Quantum singular value transformation

Yuan Su
AWS Center for Quantum Computing

arXiv:1806.01838

Fundamental circuit of quantum computation



- **State vector**: $|\psi\rangle \in \mathbb{C}^{2^n}$ is an ℓ_2-normalized column vector; $\langle\psi|$ denotes its conjugate transpose; $|0\cdots0\rangle \in \mathbb{C}^{2^k}$ has first entry 1 and remaining entries 0.
- **Unitary**: $U : \mathbb{C}^{2^{k+n}} \to \mathbb{C}^{2^{k+n}}$ satisfies $U^\dagger U = I$.
- **Measurement**: Desired outcome is $|0\cdots0\rangle$ on the ancilla, happening with probability $p_{\text{succ}} = \|(\langle 0\cdots0| \otimes I)U(|0\cdots0\rangle \otimes |\psi\rangle)\|^2$. Then the state becomes

$$\frac{(\langle 0\cdots0| \otimes I)U(|0\cdots0\rangle \otimes |\psi\rangle)}{\|(\langle 0\cdots0| \otimes I)U(|0\cdots0\rangle \otimes |\psi\rangle)\|}.$$

Query complexity

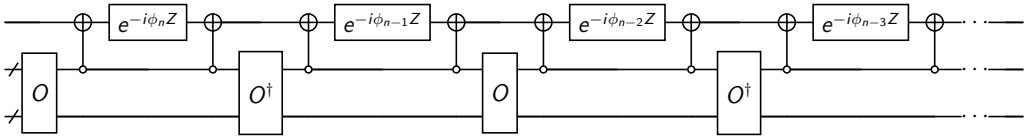

- **Query complexity**: The number of calls to subroutines O and $O^\dagger$.
- The computation may use additional single- and two-qubit gates, such as

$$e^{-i\phi Z} = \begin{bmatrix} e^{-i\phi} & 0 \\ 0 & e^{i\phi} \end{bmatrix}, \qquad = \begin{bmatrix} 0 & 1 & 0 & 0 \\ 1 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}.$$

- Other resource measures (space/gate/sample cost, depth) are also of interest.

Hamiltonian simulation

- Unitary dynamics of a quantum system $U(t)$ are determined by its Hermitian Hamiltonian $H(t)$ according to the **Schrödinger equation**

$$\frac{\mathrm{d}}{\mathrm{d}t}U(t) = -iH(t)U(t), \qquad U(0) = I.$$

- When $H(t) \equiv H$ is time independent, the solution can be represented in closed form by a unitary as

$$U(t) = e^{-itH}.$$

Hamiltonian simulation

Given Hamiltonian H and time t, perform e^{-itH} up to error ϵ:

$$\left\| \widetilde{U}(t) - e^{-itH} \right\| \leq \epsilon.$$

Motivations for Hamiltonian simulation

- Efficient simulations of Hamiltonian dynamics provide insights for problems in material science and chemistry.
- Many quantum algorithms call Hamiltonian simulation as a subroutine.







$$A \quad x \quad = \quad b$$

"*... nature isn't classical, dammit, and if you want to make a simulation of nature, you'd better make it quantum mechanical, and by golly it's a wonderful problem, because it doesn't look so easy.*"

— Richard Feynman

Matrix exponentiation problem

- Hamiltonian simulation can be reformulated in terms of **matrix exponentiation**:
  - eigendecomposition: $H = V\Lambda V^\dagger \Rightarrow e^{-itH} = Ve^{-it\Lambda}V^\dagger$;
  - Taylor expansion: $e^{-itH} = I - itH - \frac{t^2}{2!}H^2 + \frac{it^3}{3!}H^3 + \cdots$;
  - contour integration: $e^{-itH} = \frac{1}{2\pi i}\int_{\mathcal{C}} \mathrm{d}z\ e^{-itz}\left(zI - H\right)^{-1}$;
  - $\cdots$



Exponentiating diagonal matrix

$$\exp\left(-it\begin{bmatrix}-2 & & \\ & 0 & \\ & & 2\end{bmatrix}\right) = \begin{bmatrix}e^{i2t} & & \\ & 1 & \\ & & e^{-i2t}\end{bmatrix}.$$

Matrix exponentiation problem (cont'd)

Exponentiating Heisenberg spin model[1]

$$\exp\left(-it\begin{bmatrix} 0.17121 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & -1.8288 & 2 & 0 & 0 & 0 & 0 & 0 \\ 0 & 2 & -1.903 & 0 & 2 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0.097034 & 0 & 2 & 0 & 0 \\ 0 & 0 & 2 & 0 & -0.097034 & 0 & 0 & 0 \\ 0 & 0 & 0 & 2 & 0 & -2.097 & 2 & 0 \\ 0 & 0 & 0 & 0 & 0 & 2 & 1.8288 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 3.8288 \end{bmatrix}\right)$$

$$= \exp\left(-it\left(X_1X_2 + X_2X_3 + Y_1Y_2 + Y_2Y_3 + Z_1Z_2 + Z_2Z_3 + h_1Z_1 + h_2Z_2\right)\right) = ?$$

- How does a quantum computer help with Hamiltonian simulation?
  - A 2^n-by-2^n Hamiltonian H acts on n qubits, built from classical input.
  - **Performing e^{-itH} uses polynomial amount of quantum resources.**
  - Static and dynamic properties can be estimated by measuring the final state.

[1] [Childs, Maslov, Nam, Ross, Su, arXiv:1711.10980]

Roadmap

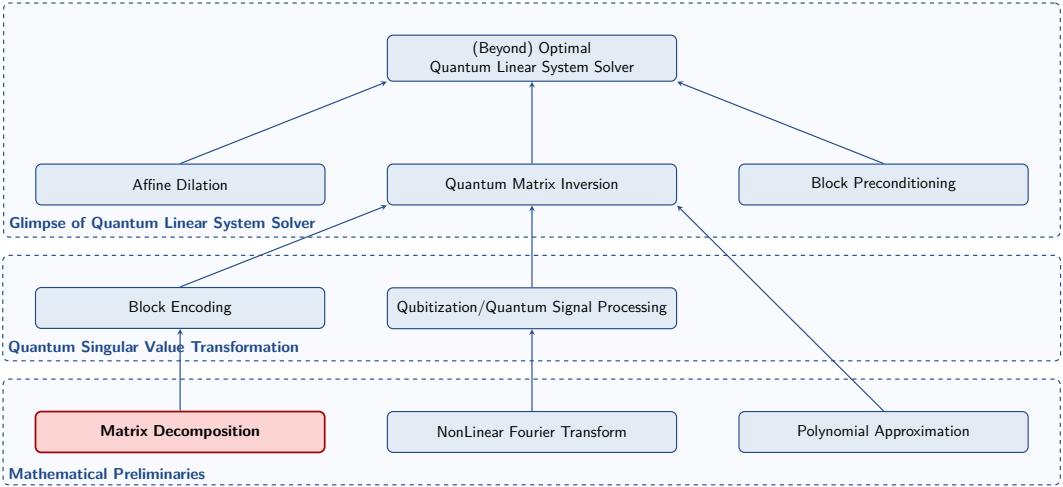
(Beyond) Optimal
Quantum Linear System Solver
Affine Dilation
Quantum Matrix Inversion
Block Preconditioning
Glimpse of Quantum Linear System Solver
Block Encoding
Qubitization/Quantum Signal Processing
Quantum Singular Value Transformation
Matrix Decomposition
NonLinear Fourier Transform
Polynomial Approximation
Mathematical Preliminaries

Example of singular value decomposition

- Unitary matrices always preserve the length of vectors. For instance,

$$\left\| \begin{bmatrix} 0 & 1 \\ 1 & 0 \end{bmatrix} \begin{bmatrix} x_0 \\ x_1 \end{bmatrix} \right\| = \sqrt{|x_0|^2 + |x_1|^2} = \left\| \begin{bmatrix} x_0 \\ x_1 \end{bmatrix} \right\|.$$

- This is not true for a generic matrix:

$$\left\| \begin{bmatrix} 0 & \frac{1}{2} \\ 1 & 0 \end{bmatrix} \begin{bmatrix} x_0 \\ x_1 \end{bmatrix} \right\| = \sqrt{|x_0|^2 + \frac{1}{4}|x_1|^2} \neq \left\| \begin{bmatrix} x_0 \\ x_1 \end{bmatrix} \right\|.$$

- Nevertheless, the **singular value decomposition** asserts that any square matrix is composed by a unitary matrix, a diagonal matrix, and another unitary:

$$\begin{bmatrix} 0 & \frac{1}{2} \\ 1 & 0 \end{bmatrix} = \begin{bmatrix} 0 & 1 \\ 1 & 0 \end{bmatrix} \begin{bmatrix} 1 & \\ & \frac{1}{2} \end{bmatrix} \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix}.$$

Existence of singular value decomposition

Existence of singular value decomposition

For any square matrix A, there exist unitaries $U = \sum_j |\psi_j\rangle\langle j|$, $V = \sum_j |\phi_j\rangle\langle j|$ and diagonal $\Sigma = \sum_j \sigma_j |j\rangle\langle j|$, such that

$$A = V\Sigma U^\dagger = \sum_j \sigma_j |\phi_j\rangle\langle\psi_j| .$$

- Let $|\phi_0\rangle$ and $|\psi_0\rangle$ solve the optimization problem

$$\|A\| = \max_{\||\phi_0\rangle\|=\||\psi_0\rangle\|=1} |\langle\phi_0| A |\psi_0\rangle| .$$

- Key observation: $A|\psi_0\rangle \in \mathbf{Span}(|\phi_0\rangle)$ and $A^\dagger|\phi_0\rangle \in \mathbf{Span}(|\psi_0\rangle)$.
- This implies $A^\dagger \mathbf{Span}^\perp(|\phi_0\rangle) \subseteq \mathbf{Span}^\perp(|\psi_0\rangle)$ and $A\,\mathbf{Span}^\perp(|\psi_0\rangle) \subseteq \mathbf{Span}^\perp(|\phi_0\rangle)$.
- Recursively optimize over $\mathbf{Span}^\perp(|\phi_0\rangle)$ and $\mathbf{Span}^\perp(|\psi_0\rangle)$.

Uniqueness of singular value decomposition

"Uniqueness" of singular value decomposition[2]

Suppose $A = V_1\Sigma_1 U_1^\dagger = V_2\Sigma_2 U_2^\dagger$ are both singular value decompositions.

- $\Sigma_1, \Sigma_2 \geq 0$ WLOG;
- Σ_1, Σ_2 coincide up to a permutation;
- $V_1(\cdot)U_1^\dagger$, $V_2(\cdot)U_2^\dagger$ differ by a unitary conjugation for each positive singular value.

For instance, all the possible singular value decompositions of $\begin{bmatrix} 0 & \frac{1}{2} & 0 \\ 1 & 0 & 0 \\ 0 & 0 & 0 \end{bmatrix}$ are given by

$$\begin{bmatrix} 0 & \frac{1}{2} & 0 \\ 1 & 0 & 0 \\ 0 & 0 & 0 \end{bmatrix} = \begin{bmatrix} 0 & 1 & 0 \\ 1 & 0 & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} e^{i\theta_1} & & \\ & e^{i\theta_{1/2}} & \\ & & e^{i\theta_{0,\text{left}}} \end{bmatrix} \begin{bmatrix} 1 & & \\ & \frac{1}{2} & \\ & & 0 \end{bmatrix} \begin{bmatrix} e^{-i\theta_1} & & \\ & e^{-i\theta_{1/2}} & \\ & & e^{-i\theta_{0,\text{right}}} \end{bmatrix} \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix}.$$

[2] [Horn, Johnson, *Matrix Analysis*, Theorem 2.6.5]

Singular value transformation

Singular value transformation

Given singular value decomposition $A = V\Sigma U^\dagger = \sum_j \sigma_j |\phi_j\rangle\langle\psi_j|$ and function f, define

$$f_{\mathsf{sv}}(A) = \begin{cases} Vf(\Sigma)U^\dagger = \sum_j f(\sigma_j)\,|\phi_j\rangle\langle\psi_j|\,, & f \text{ is odd,} \\ Uf(\Sigma)U^\dagger = \sum_j f(\sigma_j)\,|\psi_j\rangle\langle\psi_j|\,, & f \text{ is even.} \end{cases}$$

The **singular value transformation $f_{\mathsf{sv}}(\cdot)$** is indeed well-defined.

- $U(\cdot)U^\dagger$ only varies by a unitary conjugation for each singular value, which commutes through f and cancels out.
- $V(\cdot)U^\dagger$ only varies by a unitary conjugation for each positive singular value, which commutes through f and cancels out.
- $f(0) = 0$ for the zero singular value when f is odd.

Examples of singular value transformation

Hermitian matrix and Hermitian dilation

- $f_{\mathbf{sv}}(H) = f(H)$, if H is Hermitian and f is either odd or even;
- $f\left(\begin{bmatrix} 0 & A^\dagger \\ A & 0 \end{bmatrix}\right) = \begin{bmatrix} 0 & f_{\mathbf{sv}}(A^\dagger) \\ f_{\mathbf{sv}}(A) & 0 \end{bmatrix}$ if f is odd;
- $f\left(\begin{bmatrix} 0 & A^\dagger \\ A & 0 \end{bmatrix}\right) = \begin{bmatrix} f_{\mathbf{sv}}(A) & 0 \\ 0 & f_{\mathbf{sv}}(A^\dagger) \end{bmatrix}$ if f is even.

Power functions and inverse function

- $(A)^t_{\mathbf{sv}} = A(A^\dagger A)^{\frac{t-1}{2}}$ if integer $t > 0$ is odd;
- $(A)^t_{\mathbf{sv}} = (A^\dagger A)^{\frac{t}{2}}$ if integer $t > 0$ is even;
- $(A)^{-1}_{\mathbf{sv}} = A^{-1\dagger}$.

Challenge: perform $f(A)$ using $f_{\mathbf{sv}}(A)$ when A is a generic matrix.[3]

[3] [Low, Su, arXiv:2401.06240]

Cosine-Sine decomposition

Cosine-Sine decomposition[4]

Give any unitary $U = \begin{bmatrix} U_{00} & U_{01} \\ U_{10} & U_{11} \end{bmatrix}$ partitioned into square matrices of the same size, there exist unitaries V_0, V_1, W_0, W_1 and diagonal $0 \leq \Sigma \leq I$ such that

$$U = \begin{bmatrix} U_{00} & U_{01} \\ U_{10} & U_{11} \end{bmatrix} = \begin{bmatrix} V_0 & \\ & V_1 \end{bmatrix} \begin{bmatrix} \Sigma & \sqrt{1-\Sigma^2} \\ \sqrt{1-\Sigma^2} & -\Sigma \end{bmatrix} \begin{bmatrix} W_0^\dagger & \\ & W_1^\dagger \end{bmatrix}.$$

- Given singular value decompositions $U_{00} = V_0 D_0 R_0^\dagger$ and $U_{10} = V_1 D_1 R_1^\dagger$,

$$I = U_{00}^\dagger U_{00} + U_{10}^\dagger U_{10} = R_0 D_0^2 R_0^\dagger + R_1 D_1^2 R_1^\dagger.$$

- By the uniqueness property, choose $R_0 = R_1 = W_0$, $D_0 = \Sigma$, $D_1 = \sqrt{1-\Sigma^2}$.
- Verify that $W_1 = U_{01}^\dagger V_0 \sqrt{1-\Sigma^2} - U_{11}^\dagger V_1 \Sigma$ yields the desired decomposition.

[4] [Gawlik, Nakatsukasa, Sutton, arXiv:1804.09002]

Example of Cosine-Sine decomposition

Cosine-Sine decomposition of the shift operator

The lower shift matrix $\left[\begin{smallmatrix} 0 & 0 \\ 1 & 0 \end{smallmatrix}\right]$ has the singular value decomposition

$$\begin{bmatrix} 0 & 0 \\ 1 & 0 \end{bmatrix} = \begin{bmatrix} 0 & 1 \\ 1 & 0 \end{bmatrix} \begin{bmatrix} 1 & \\ & 0 \end{bmatrix} \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix}.$$

This induces the Cosine-Sine decomposition of the cyclic shift operator

$$\left[\begin{array}{cc:cc} 0 & 0 & 0 & 1 \\ 1 & 0 & 0 & 0 \\ \hdashline 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \end{array}\right] = \left[\begin{array}{cc:cc} 0 & 1 & & \\ 1 & 0 & & \\ \hdashline & & 0 & 1 \\ & & 1 & 0 \end{array}\right] \left[\begin{array}{cc:cc} 1 & & 0 & \\ & 0 & & 1 \\ \hdashline 0 & & -1 & \\ & 1 & & 0 \end{array}\right] \left[\begin{array}{cc:cc} 1 & 0 & & \\ 0 & 1 & & \\ \hdashline & & -1 & 0 \\ & & 0 & 1 \end{array}\right].$$

Check the exercise session for a Hermitian variant of CS decomposition.

Roadmap

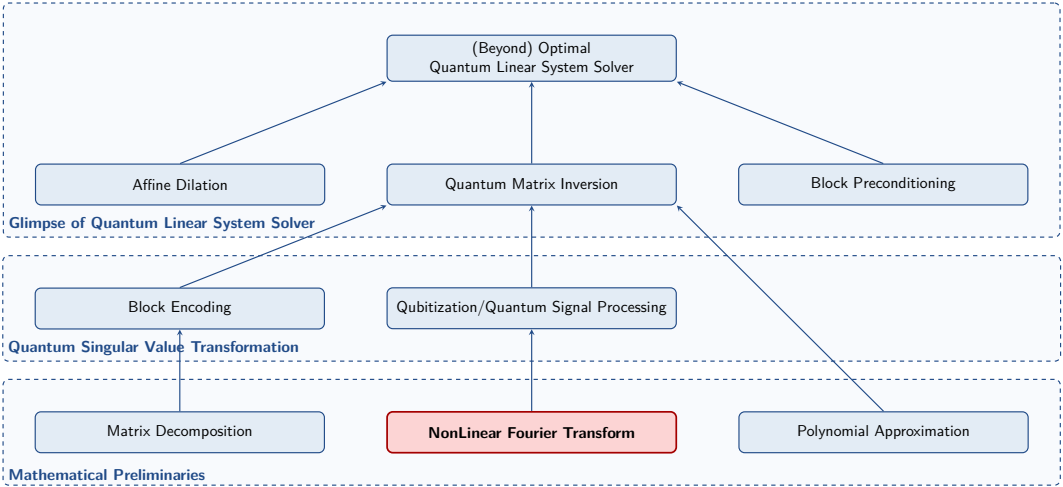
(Beyond) Optimal
Quantum Linear System Solver
Affine Dilation
Quantum Matrix Inversion
Block Preconditioning
Glimpse of Quantum Linear System Solver
Block Encoding
Qubitization/Quantum Signal Processing
Quantum Singular Value Transformation
Matrix Decomposition
NonLinear Fourier Transform
Polynomial Approximation
Mathematical Preliminaries

Definition of nonlinear Fourier transform

Nonlinear Fourier transform

Given sequence $\{\gamma_k\}_{k=m}^n$ with integers $m \leq n$, define

$$\mathbf{NLFT}[\{\gamma_k\}_k](z) = \prod_{k=m}^{n} \left(\frac{1}{\sqrt{1+|\gamma_k|^2}} \begin{bmatrix} 1 & \gamma_k z^k \\ -\overline{\gamma_k} z^{-k} & 1 \end{bmatrix} \right).$$

- When $\|\gamma\|_\infty = \max_{m \leq k \leq n} |\gamma_k|$ is small, this reduces to the Z-transform

$$\mathbf{NLFT}[\{\gamma_k\}_k](z) = \begin{bmatrix} 1 & \sum_{k=m}^n \gamma_k z^k \\ -\sum_{k=m}^n \overline{\gamma_k} z^{-k} & 1 \end{bmatrix} + \mathbf{O}\left(\|\gamma\|_\infty^2\right).$$

- On the unit circle, this gives the (Discrete-Time) Fourier Transform

$$\mathbf{NLFT}[\{\gamma_k\}_k]\left(e^{i\theta}\right) = \begin{bmatrix} 1 & \sum_{k=m}^n \gamma_k e^{ik\theta} \\ -\sum_{k=m}^n \overline{\gamma_k} e^{-ik\theta} & 1 \end{bmatrix} + \mathbf{O}\left(\|\gamma\|_\infty^2\right).$$

Elementary properties

Elementary properties of nonlinear Fourier transform

$\mathbf{NLFT}[\{\gamma_k\}_k](z) = \frac{1}{\sqrt{1+|\gamma_m|^2}} \begin{bmatrix} 1 & \gamma_m z^m \\ -\overline{\gamma_m} z^{-m} & 1 \end{bmatrix} \cdots \frac{1}{\sqrt{1+|\gamma_n|^2}} \begin{bmatrix} 1 & \gamma_n z^n \\ -\overline{\gamma_n} z^{-n} & 1 \end{bmatrix}$ satisfies:

- zero sequence: $\mathbf{NLFT}[0](z) = I$;
- time negation: $\mathbf{NLFT}[\{-\gamma_k\}_k](z) = [\,1\ 1\,]\,\mathbf{NLFT}[\{\overline{\gamma_k}\}_k](z^{-1})\,[\,1\ 1\,]$;
- time conjugation: $\mathbf{NLFT}[\{\overline{\gamma_k}\}_k](z) = \overline{\mathbf{NLFT}[\{\gamma_k\}_k](\overline{z})}$;
- time modulation: $\mathbf{NLFT}[\{e^{ik\theta}\gamma_k\}_k](z) = \mathbf{NLFT}[\{\gamma_k\}_k](e^{i\theta}z)$;
- time shift: $\mathbf{NLFT}[\{\gamma_{k-\ell}\}_k](z) = \begin{bmatrix} 1 & \\ & z^{-\ell} \end{bmatrix} \mathbf{NLFT}[\{\gamma_k\}_k](z) \begin{bmatrix} 1 & \\ & z^{\ell} \end{bmatrix}$;
- time reversal: $\mathbf{NLFT}[\{\gamma_{-k}\}_k](z) = (\mathbf{NLFT}[\{-\overline{\gamma_k}\}_k](z))^{\top}$.

Image of nonlinear Fourier transform

- Assume $m = 0$ WLOG and denote $\prod_{k=0}^{n} \left(\frac{1}{\sqrt{1+|\gamma_k|^2}} \begin{bmatrix} 1 & \gamma_k z^k \\ -\overline{\gamma_k} z^{-k} & 1 \end{bmatrix} \right) = \begin{bmatrix} a(z) & b(z) \\ -b^*(z) & a^*(z) \end{bmatrix}$.
  - $a(z)$ is a Laurent polynomial supported on degrees $[-n, 0]$;
  - $b(z)$ is a polynomial supported on degrees $[0, n]$;
  - $a^*(z) = \overline{a(\overline{z}^{-1})}$ and $b^*(z) = \overline{b(\overline{z}^{-1})}$;
  - $a(z)a^*(z) + b(z)b^*(z) = 1$;
  - $a^*(0) = \prod_{k=0}^{n} \frac{1}{\sqrt{1+|\gamma_k|^2}} > 0$.

- This can be verified through a direct matrix multiplication like

$$\begin{bmatrix} 1 & \gamma_k z^k \\ -\overline{\gamma_k} z^{-k} & 1 \end{bmatrix} \begin{bmatrix} 1 & \gamma_{k+1} z^{k+1} \\ -\overline{\gamma_{k+1}} z^{-k-1} & 1 \end{bmatrix} = \begin{bmatrix} 1 - \gamma_k \overline{\gamma_{k+1}} z^{-1} & \gamma_{k+1} z^{k+1} + \gamma_k z^k \\ -\overline{\gamma_k} z^{-k} - \overline{\gamma_{k+1}} z^{-k-1} & -\overline{\gamma_k}\gamma_{k+1} z + 1 \end{bmatrix}.$$

Nonlinear Fourier transform bijection

Nonlinear Fourier transform bijection

For any integer $m \leq n$, the nonlinear Fourier transform is a bijection between

- complex sequences $\{\gamma_k\}_{k=m}^{n}$ with support $[m, n]$; and
- special linear matrices $\begin{bmatrix} a(z) & b(z) \\ -b^*(z) & a^*(z) \end{bmatrix}$, where
  - $a(z)$ is a Laurent polynomial supported on degrees $[m-n, 0]$;
  - $b(z)$ is a Laurent polynomial supported on degrees $[m, n]$;
  - $a^*(z) = \overline{a(\overline{z}^{-1})}$ and $b^*(z) = \overline{b(\overline{z}^{-1})}$;
  - $a(z)a^*(z) + b(z)b^*(z) = 1$;
  - $a^*(0) > 0$.

It thus makes sense to talk about the **inverse nonlinear Fourier transform**.

Layer stripping

- The full transformation $\prod_{k=0}^{n}\left(\frac{1}{\sqrt{1+|\gamma_k|^2}}\begin{bmatrix}1 & \gamma_k z^k\\ -\overline{\gamma_k}z^{-k} & 1\end{bmatrix}\right)=\begin{bmatrix}a(z) & b(z)\\ -b^*(z) & a^*(z)\end{bmatrix}$ and its shifted trailing $\prod_{k=0}^{n-1}\left(\frac{1}{\sqrt{1+|\gamma_{k+1}|^2}}\begin{bmatrix}1 & \gamma_{k+1} z^k\\ -\overline{\gamma_{k+1}}z^{-k} & 1\end{bmatrix}\right)=\begin{bmatrix}a_1(z) & b_1(z)\\ -b_1^*(z) & a_1^*(z)\end{bmatrix}$ then satisfy

$$\frac{1}{\sqrt{1+|\gamma_0|^2}}\begin{bmatrix}a(z)+\gamma_0 b^*(z) & b(z)-\gamma_0 a^*(z)\\ \overline{\gamma_0}a(z)-b^*(z) & \overline{\gamma_0}b(z)+a^*(z)\end{bmatrix}=\begin{bmatrix}a_1(z) & z b_1(z)\\ -z^{-1}b_1^*(z) & a_1^*(z)\end{bmatrix}.$$

- Denoting $b_k(z)=\sum_{j=0}^{n-1-k} b_{j,k}z^j$ and $a_k^*(z)=\sum_{j=0}^{n-1-k} a_{j,k}z^j$, we can describe layer stripping recursively using Givens rotation as[5]

$$\begin{bmatrix}a_{0,k+1} & 0\\ a_{1,k+1} & b_{0,k+1}\\ \vdots & \vdots\\ a_{n-k-2,k+1} & b_{n-k-3,k+1}\\ 0 & b_{n-k-2,k+1}\end{bmatrix}=\begin{bmatrix}a_{0,k} & b_{0,k}\\ a_{1,k} & b_{1,k}\\ \vdots & \vdots\\ a_{n-k-2,k} & b_{n-k-2,k}\\ a_{n-k-1,k} & b_{n-k-1,k}\end{bmatrix}\frac{1}{\sqrt{1+|\gamma_k|^2}}\begin{bmatrix}1 & -\gamma_k\\ \overline{\gamma_k} & 1\end{bmatrix}.$$

[5] [Ni, Sarkar, Ying, Lin, arXiv:2505.12615]

Roadmap

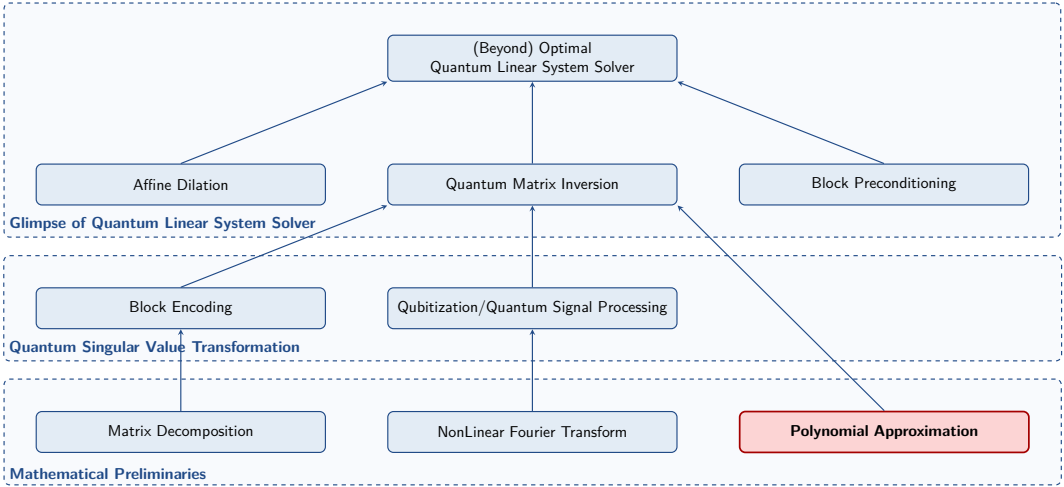
(Beyond) Optimal
Quantum Linear System Solver
Affine Dilation
Quantum Matrix Inversion
Block Preconditioning
Glimpse of Quantum Linear System Solver
Block Encoding
Qubitization/Quantum Signal Processing
Quantum Singular Value Transformation
Matrix Decomposition
NonLinear Fourier Transform
Polynomial Approximation
Mathematical Preliminaries

Uniform polynomial approximation

Uniform polynomial approximation over the unit interval

Given continuous function $f(x)$ over the unit interval $[-1, 1]$ and accuracy ϵ, find a polynomial $p_n(x)$ such that

$$\|p_n - f\|_\infty = \max_{x \in [-1,1]} |p_n(x) - f(x)| \leq \epsilon,$$

with degree n as small as possible.

- Taylor series is generally not good for uniform approximation. For instance,

  $$f(x) = \frac{\eta}{\sqrt{\eta^2 + x^2}}$$

  is analytic over the entire $[-1, 1]$ whenever $0 < \eta < 1$.

- However, its Taylor series at $x = 0$ only converges on the subinterval $[-\eta, \eta]$.

Definition of Chebyshev polynomials

Chebyshev polynomials

Given nonnegative integer j, the degree-j Chebyshev polynomial of the first kind is

$$\mathbf{T}_j(x) = \cos\left(j \arccos(x)\right) = \sum_{\substack{0 \le k \le j \\ k \text{ is even}}} \binom{j}{k} i^k x^{j-k} \sqrt{1-x^2}^k.$$

- Given $f(x) = \sum_{j=0}^{\infty} \beta_j \mathbf{T}_j(x)$, the expansion coefficients are determined by

$$\beta_j = \begin{cases} \frac{2}{\pi} \int_{-1}^{1} \mathbf{T}_j(x) f(x) \frac{\mathrm{d}x}{\sqrt{1-x^2}} = \frac{2}{\pi} \int_0^{\pi} \cos(j\phi) f(cos(\phi)) \mathrm{d}\phi, & j \ge 1, \\ \frac{1}{\pi} \int_{-1}^{1} \mathbf{T}_0(x) f(x) \frac{\mathrm{d}x}{\sqrt{1-x^2}} = \frac{1}{\pi} \int_0^{\pi} f(cos(\phi)) \mathrm{d}\phi, & j = 0. \end{cases}$$

- Conversely, using the above formula, we can define $p_{\text{cheby},n} = \sum_{j=0}^{n} \beta_j \mathbf{T}_j(x)$.

(Nearly) optimal uniform polynomial approximation

(Nearly) optimal uniform polynomial approximation

Given continuous $f(x)$ over $[-1,1]$ and integer $n>0$,

- existence: $\|p_{\text{opt},n}-f\|_\infty=\min_{p_n}\|p_n-f\|_\infty$ for some $p_{\text{opt},n}$;
- uniqueness: $\|p_{\text{opt},n}-f\|_\infty=\inf_{p_n}\|p_n-f\|_\infty$ for at most one $p_{\text{opt},n}$;
- near optimality: $\|p_{\text{cheby},n}-f\|_\infty\leq\left(4+\frac{4}{\pi^2}\ln(n)\right)\|p_{\text{opt},n}-f\|_\infty$.

- Uniqueness follows from the equioscillation principle (omitted).
- For the existence, it suffices to restrict to all $\|p_n-f\|_\infty\leq\|0-f\|_\infty$:
  - $\|p_n-f\|_\infty$ is continuous in p_n;
  - p_n belong to a continuous preimage of a closed interval;
  - $\|p_n\|_\infty\leq 2\|f\|_\infty$ are bounded.

Near optimality of Chebyshev approximation

- For the near optimality of Chebyshev approximation, we want to bound

$$\|p_{\text{cheby},n} - f\|_\infty \leq \|p_{\text{opt},n} - f\|_\infty + \|p_{\text{opt},n} - p_{\text{cheby},n}\|_\infty .$$

- The second term has the integral representation[6]

$$[p_{\text{opt},n} - p_{\text{cheby},n}](\cos(\theta)) = \frac{1}{2\pi}\int_{-\pi}^{\pi} \mathrm{d}\phi \; [p_{\text{opt},n} - f](\cos(\theta - \phi)) \frac{\sin\left((2n+1)\frac{\phi}{2}\right)}{\sin\left(\frac{\phi}{2}\right)},$$

  which implies

$$\|p_{\text{opt},n} - p_{\text{cheby},n}\|_\infty \leq \|p_{\text{opt},n} - f\|_\infty \frac{1}{2\pi}\int_{-\pi}^{\pi} \mathrm{d}\phi \left|\frac{\sin\left((2n+1)\frac{\phi}{2}\right)}{\sin\left(\frac{\phi}{2}\right)}\right| .$$

- Finally, estimate the L_1-norm of the **Dirichlet kernel**.

[6] [Rivlin, *Chebyshev Polynomials*, Theorem 3.3]

Analysis of Chebyshev approximation error

- With $x = \cos(\theta)$, Chebyshev approximation becomes Fourier approximation.
- Introducing $w = e^{i\theta}$ and assuming $f\left(\frac{w+w^{-1}}{2}\right)$ is analytic on the annulus $\mathcal{A}_\rho = \{\rho^{-1} \leq |w| \leq \rho\}$ with $\rho > 1$, this then becomes Laurent approximation

$$f\left(\frac{w+w^{-1}}{2}\right) \approx \sum_{j=-n}^{n} \widetilde{\beta}_j w^j, \qquad \widetilde{\beta}_j = \frac{1}{2\pi i}\int_{|\zeta|=\rho} \mathrm{d}\zeta \frac{f\left(\frac{\zeta+\zeta^{-1}}{2}\right)}{\zeta^{j+1}} = \frac{1}{2\pi i}\int_{|\zeta|=\rho^{-1}} \mathrm{d}\zeta \frac{f\left(\frac{\zeta+\zeta^{-1}}{2}\right)}{\zeta^{j+1}}.$$

- We then obtain the decay of expansion coefficients and Fourier error bound

$$\left|\widetilde{\beta}_j\right| \leq \max_{\zeta\in\mathcal{A}_\rho} \left|f\left(\frac{\zeta+\zeta^{-1}}{2}\right)\right| \rho^{-|j|}, \qquad \left|f(\cos(\theta)) - \sum_{j=-n}^{n} \widetilde{\beta}_j e^{ij\theta}\right| \leq \max_{\zeta\in\mathcal{A}_\rho} \left|f\left(\frac{\zeta+\zeta^{-1}}{2}\right)\right| \frac{2\rho^{-n}}{\rho-1}.$$

Error bound using the Bernstein ellipse





- $z = \frac{w+w^{-1}}{2}$ maps the annulus $\mathcal{A}_\rho$ conformally onto the **Bernstein ellipse** $\mathcal{B}_\rho = \left\{ \left(\frac{\Re(z)}{\frac{\rho+\rho^{-1}}{2}} \right)^2 + \left(\frac{\Im(z)}{\frac{\rho-\rho^{-1}}{2}} \right)^2 = 1 \right\}$, giving the Chebyshev error bound[7]

$$\left\| f - \sum_{j=0}^{n} \beta_j \mathbf{T}_j \right\|_{\infty,[-1,1]} \leq \|f\|_{\infty,\mathcal{B}_\rho} \frac{2\rho^{-n}}{\rho - 1}.$$

[7] [Tang, Tian, arXiv:2302.14324]

Polynomial approximation for Green's function estimation

Polynomial approximation for Green's function estimation

Consider the function $f(x) = \frac{\eta}{\sqrt{\eta^2+x^2}}$ over $x \in [-1,1]$ with $0 < \eta < 1$.

- Circumscribe the Bernstein ellipse by a stadium, with semidisks centered at ± 1 with radius $\frac{\eta}{2}$.
- $\|f\|_{\infty,\text{stadium}} = \frac{2}{\sqrt{3}}$ attained at the center of top and bottom edges.
- Choosing $\frac{\rho-\rho^{-1}}{2} = \frac{\eta}{2} \Leftrightarrow \rho = \frac{\eta}{2} + \sqrt{\frac{\eta^2}{4}+1}$ gives $\left\| f - \sum_{j=0}^{n} \beta_j \mathbf{T}_j \right\|_{\infty,[-1,1]} = \frac{1}{\eta(1+\Theta(\eta))^n}$.



To achieve accuracy ϵ, one can thus choose $n = \mathbf{O}\left(\frac{1}{\eta}\log\left(\frac{1}{\eta\epsilon}\right)\right)$.

Polynomial approximation for Hamiltonian simulation

Polynomial approximation for Hamiltonian simulation

Consider the function $f(x) = e^{-itx}$ over $x \in [-1, 1]$ for large $t > 0$.

- Note that $|e^{-itz}| \leq e^{t|\Im(z)|} \leq e^{t\frac{\rho-\rho^{-1}}{2}} \leq e^{t(\rho-1)}$ over the Bernstein ellipse.
- This gives $\left\| f - \sum_{j=0}^{n} \beta_j \mathbf{T}_j \right\|_{\infty,[-1,1]} = \mathbf{O}\left(\frac{e^{t(\rho-1)}}{\rho^n(\rho-1)}\right)$.
- Choosing $\rho = \frac{n}{t} = \mathbf{\Omega}(1)$ simplifies the bound to

$$\left\| f - \sum_{j=0}^{n} \beta_j \mathbf{T}_j \right\|_{\infty,[-1,1]} = \mathbf{O}\left(\frac{(et)^n}{e^t n^n \left(\frac{n}{t} - 1\right)}\right) = \mathbf{O}\left(\frac{(et)^n}{n^n}\right).$$

To achieve accuracy ϵ, one can thus choose $n = \mathbf{O}\left(t + \log\left(\frac{1}{\epsilon}\right)\right)$.

Polynomial approximation for singular vector projection

Polynomial approximation for singular vector projection

Consider $\mathbf{Sign}(x) = \begin{cases} 1, & x > 0, \\ -1, & x < 0, \end{cases}$ over $x \in [-1, -\delta] \cup [\delta, 1]$ for small $0 < \delta < 1$.

- Replace **Sign** by $\mathbf{Erf}(cx) = \frac{2}{\sqrt{\pi}} \int_0^{cx} \mathrm{d}u \ e^{-u^2}$ analytic over $[-1, 1]$.
- Approximate **Erf** by Chebyshev polynomials.
- The error analysis is subtler than the Bernstein ellipse argument.[8]

To achieve accuracy ϵ, one can choose $n = \mathbf{O}\left(\frac{1}{\delta} \log\left(\frac{1}{\epsilon}\right)\right)$.

[8] [Wan, Berta, Campbell, arXiv:2110.12071]

Polynomial approximation for matrix inversion

Polynomial approximation for matrix inversion

Consider the function $f(x) = \frac{1}{2\kappa x}$ over $x \in \left[-1, -\frac{1}{\kappa}\right] \cup \left[\frac{1}{\kappa}, 1\right]$ for large $\kappa > 0$.

- Approximate $\frac{1}{2\kappa x}$ over $\left[-1, -\frac{1}{2\kappa}\right] \cup \left[\frac{1}{2\kappa}, 1\right]$.
- Multiply it by a rectangular window function with stopband $\left[-\frac{1}{2\kappa}, \frac{1}{2\kappa}\right]$ and transition band $\left[-\frac{1}{\kappa}, -\frac{1}{2\kappa}\right] \cup \left[\frac{1}{2\kappa}, \frac{1}{\kappa}\right]$.

To achieve accuracy ϵ, one can choose $n = \mathbf{O}\left(\kappa \log\left(\frac{1}{\epsilon}\right)\right)$.

Roadmap

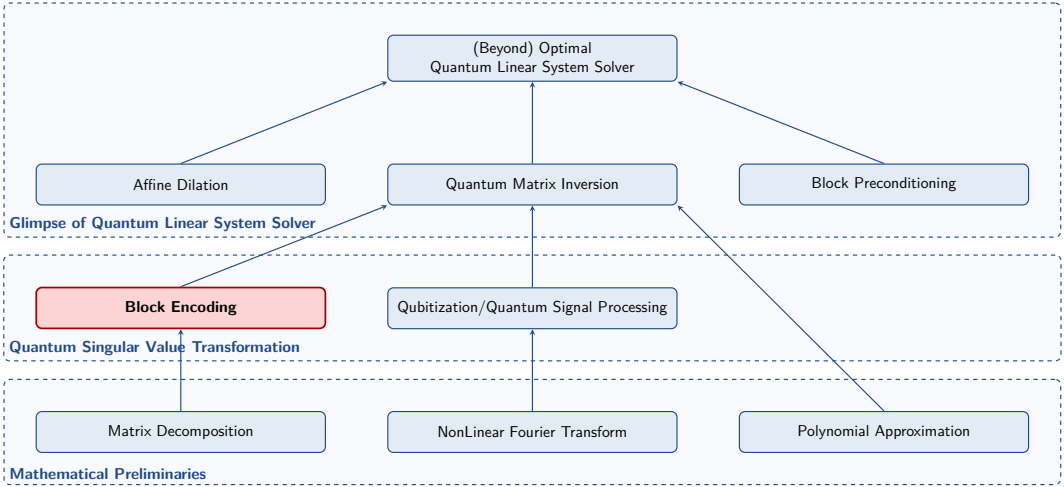
(Beyond) Optimal
Quantum Linear System Solver
Affine Dilation
Quantum Matrix Inversion
Block Preconditioning
Glimpse of Quantum Linear System Solver
Block Encoding
Qubitization/Quantum Signal Processing
Quantum Singular Value Transformation
Matrix Decomposition
NonLinear Fourier Transform
Polynomial Approximation
Mathematical Preliminaries

Fundamental circuit revisited



- We can bundle the ancilla initialization, unitary operation and measurement.
- This helps isolate and refocus on how the input state $|\psi\rangle$ transforms.

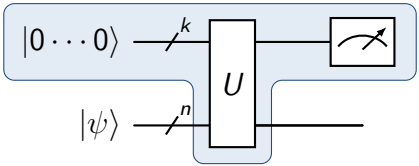

- WLOG assume the desired outcome is $|0\cdots0\rangle$.

Block encoding

Block encoding

Unitary O_A is a **block encoding**[9] of A with **normalization factor** $\alpha \geq \|A\|$ if



$$= (\langle 0| \otimes I)\, O_A\, (|0\rangle \otimes I) = \frac{A}{\alpha} \quad \Leftrightarrow \quad O_A = \begin{bmatrix} \frac{A}{\alpha} & ? \\ ? & ? \end{bmatrix}.$$

When acted on input state $|\psi\rangle$, A is applied with probability $p_{\text{succ}} = \frac{\|A|\psi\rangle\|^2}{\alpha^2}$:



$$= \sqrt{p_{\text{succ}}}\,|0\rangle\,\frac{A|\psi\rangle}{\|A|\psi\rangle\|} + \sqrt{1-p_{\text{succ}}}\,|1\rangle\,|\psi_?\rangle,$$

[9] [Low, Chuang, arXiv:1707.05391]

Unitary matrix and Hermitian conjugation

- Unitary matrices U can be block encoded with normalization factor 1.
- Suppose A is block encoded with normalization factor α_A.
- Then $A^\dagger$ can be block encoded with the same normalization factor.



$$= \frac{1}{\alpha_A} A^\dagger.$$

Tensor product

- Suppose A is block encoded with normalization factor α_A, and B is block encoded with normalization factor α_B.
- Then $A \otimes B$ can be block encoded with normalization factor $\alpha_A \alpha_B$.

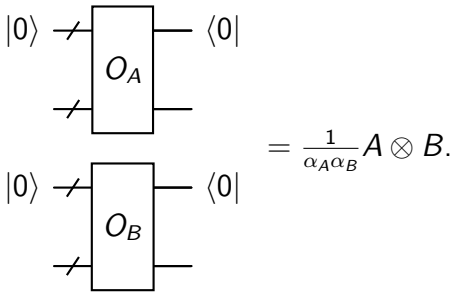

$$= \frac{1}{\alpha_A \alpha_B} A \otimes B.$$

Matrix multiplication

- Suppose A is block encoded with normalization factor α_A, and B is block encoded with normalization factor α_B.
- Then AB can be block encoded with normalization factor $\alpha_A\alpha_B$.

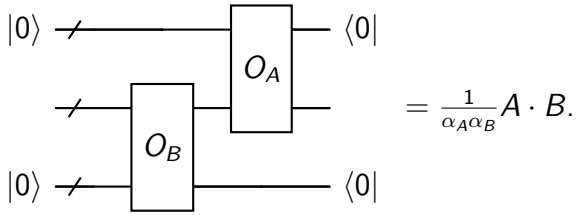

Linear combination

- Suppose A_j is block encoded with normalization factor α_j, and $c_j \geq 0$.
- Then $\sum_j c_j A_j$ can be block encoded with normalization factor $\sum_j c_j \alpha_j$.

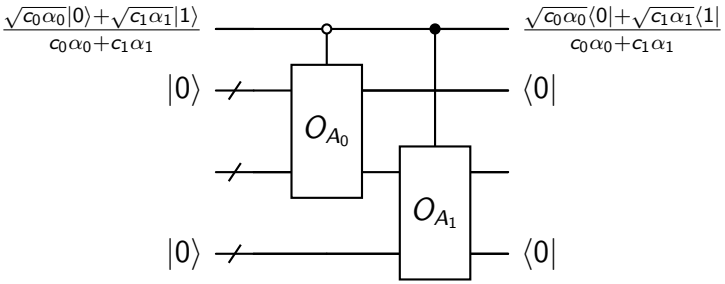

$$= \frac{1}{c_0\alpha_0+c_1\alpha_1}(c_0A_0 + c_1A_1).$$

Block encoding spin operator

Block encoding spin operator

- Consider the Heisenberg spin model (assuming $h_1, h_2 \geq 0$ WLOG)

$$H = X_1X_2 + X_2X_3 + Y_1Y_2 + Y_2Y_3 + Z_1Z_2 + Z_2Z_3 + h_1Z_1 + h_2Z_2.$$

- Define

$$\mathrm{PREP}\,|000\rangle = \frac{|000\rangle + |001\rangle + |010\rangle + |011\rangle + |100\rangle + |101\rangle + \sqrt{h_1}\,|110\rangle + \sqrt{h_2}\,|111\rangle}{\sqrt{6 + h_1 + h_2}},$$

$$\begin{aligned}\mathrm{SEL} = {} & |000\rangle\langle 000| \otimes X_1X_2 + |001\rangle\langle 001| \otimes X_2X_3 + |010\rangle\langle 010| \otimes Y_1Y_2 \\ & + |011\rangle\langle 011| \otimes Y_2Y_3 + |100\rangle\langle 100| \otimes Z_1Z_2 + |101\rangle\langle 101| \otimes Z_2Z_3 \\ & + |110\rangle\langle 110| \otimes Z_1 + |111\rangle\langle 111| \otimes Z_2.\end{aligned}$$

- Then $\left(\langle 000|\,\mathrm{PREP}^\dagger \otimes I\right)\mathrm{SEL}\left(\mathrm{PREP}\,|000\rangle \otimes I\right) = \frac{1}{\alpha}H$ with $\alpha = 6 + h_1 + h_2$.

Block encoding bosonic operator

Block encoding bosonic operator

- Consider the truncated bosonic creation operator

$$B^\dagger = \begin{bmatrix} 0 & \cdots & \cdots & \cdots & 0 \\ 1 & 0 & \ddots & \ddots & \vdots \\ 0 & \sqrt{2} & \ddots & \ddots & \vdots \\ \vdots & \ddots & \ddots & \ddots & \vdots \\ 0 & \cdots & 0 & \sqrt{n-1} & 0 \end{bmatrix} = \sum_{j=0}^{n-1} \sqrt{(j+1) \bmod n} \, |(j+1) \bmod n\rangle\langle j| \, .$$

- This can be decomposed as a cyclic shift operator and a diagonal operator

$$B^\dagger = \left(\sum_{k=0}^{n-1} \sqrt{k} \, |k\rangle\langle k| \right) \left(\sum_{j=0}^{n-1} |(j+1) \bmod n\rangle\langle j| \right) .$$

Layer cake method

Block encoding bosonic operator (cont'd)

- Suppose that function $f(x)$ satisfies $f_{\min} \leq f(x) \leq f_{\max}$.

- For any x_0, f admits the integral form[10]

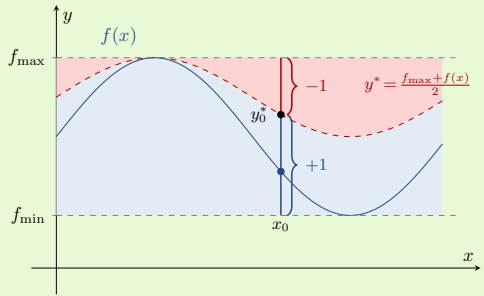

$$
\begin{aligned}
& f(x_0) - f_{\min} \\
&= \int_{f_{\min}}^{f_{\max}} \mathrm{d}y \ \ \mathbf{Sign}\left(f_{\max} + f(x_0) - 2y\right) \\
&= (+1)\left(\frac{f_{\max} + f(x_0)}{2} - f_{\min}\right) + (-1)\left(f_{\max} - \frac{f_{\max} + f(x_0)}{2}\right).
\end{aligned}
$$

[10] [Peng, Su, Claudino, Kowalski, Low, Roetteler, arXiv:2307.06580]

Discretization of Riemann integral

Block encoding bosonic operator (cont'd)

- Discretizing the integral representation for the square root function yields

$$\frac{1}{\sqrt{n-1}}\sum_{k=0}^{n-1}\sqrt{k}\,|k\rangle\langle k| = \frac{1}{\sqrt{n-1}}\int_0^{\sqrt{n-1}}\mathrm{d}y\ \sum_{k=0}^{n-1}\mathbf{Sign}\left(\sqrt{n-1}+\sqrt{k}-2y\right)|k\rangle\langle k|$$
$$\approx \frac{1}{\xi}\sum_{\zeta=0}^{\xi-1}\left(\sum_{k=0}^{n-1}\mathbf{Sign}\left(\sqrt{n-1}+\sqrt{k}-2\frac{\zeta}{\xi}\right)|k\rangle\langle k|\right).$$

- Each operator in the parentheses is a diagonal unitary, and can be implemented using inequality test.
- Altogether, this gives a block encoding of $B^\dagger$ with normalization factor $\sqrt{n-1}$.

Roadmap

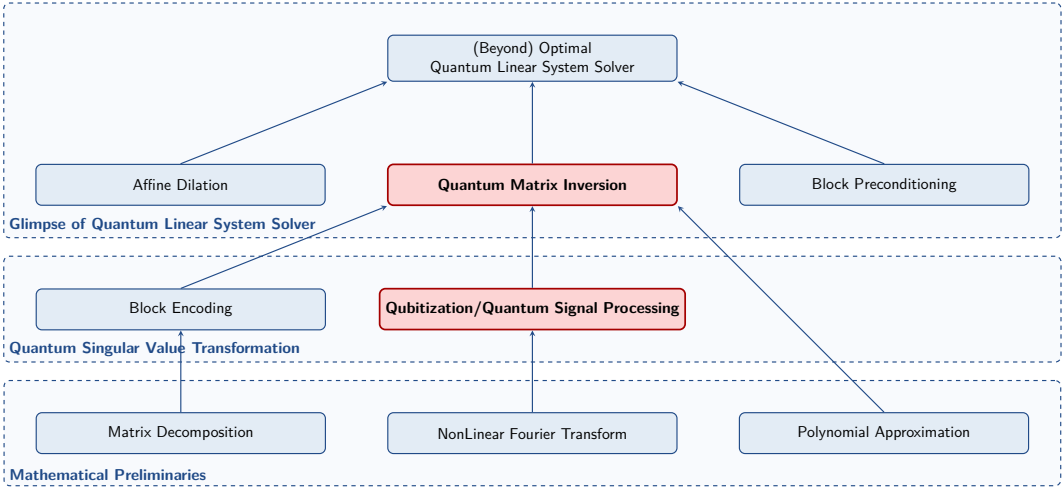
(Beyond) Optimal
Quantum Linear System Solver
Affine Dilation
Quantum Matrix Inversion
Block Preconditioning
Glimpse of Quantum Linear System Solver
Block Encoding
Qubitization/Quantum Signal Processing
Quantum Singular Value Transformation
Matrix Decomposition
NonLinear Fourier Transform
Polynomial Approximation
Mathematical Preliminaries

Quantum singular value transformation

Quantum singular value transformation

- Given positive odd n, angles $\phi_1, \ldots, \phi_n \in [0, \pi]$, and block encoding O_A, consider
$$\left(e^{-i\phi_1(2|0\rangle\langle 0|-I)} \otimes I\right) O_A \left(e^{-i\phi_2(2|0\rangle\langle 0|-I)} \otimes I\right) O_A^\dagger \cdots \left(e^{-i\phi_n(2|0\rangle\langle 0|-I)} \otimes I\right) O_A.$$
- Similarly, for positive even n, consider
$$\left(e^{-i\phi_1(2|0\rangle\langle 0|-I)} \otimes I\right) O_A^\dagger \left(e^{-i\phi_2(2|0\rangle\langle 0|-I)} \otimes I\right) O_A \cdots \left(e^{-i\phi_n(2|0\rangle\langle 0|-I)} \otimes I\right) O_A.$$

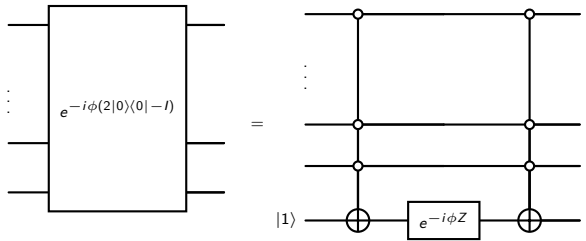

Qubitization

- Suppose $A = V_0 \Sigma W_0^\dagger$ is block encoded by O_A. Then,

$$O_A = \begin{bmatrix} A & ? \\ ? & ? \end{bmatrix} = \begin{bmatrix} V_0 & \\ & V_1 \end{bmatrix} \begin{bmatrix} \Sigma & \sqrt{1-\Sigma^2} \\ \sqrt{1-\Sigma^2} & -\Sigma \end{bmatrix} \begin{bmatrix} W_0^\dagger & \\ & W_1^\dagger \end{bmatrix}.$$

- Meanwhile, projection to the encoding space $\Pi = |0\rangle\langle 0| \otimes I$ satisfies

$$|0\rangle\langle 0| \otimes I = \begin{bmatrix} I & \\ & 0 \end{bmatrix} = \begin{bmatrix} V_0 & \\ & V_1 \end{bmatrix} \begin{bmatrix} I & \\ & 0 \end{bmatrix} \begin{bmatrix} V_0^\dagger & \\ & V_1^\dagger \end{bmatrix} = \begin{bmatrix} W_0 & \\ & W_1 \end{bmatrix} \begin{bmatrix} I & \\ & 0 \end{bmatrix} \begin{bmatrix} W_0^\dagger & \\ & W_1^\dagger \end{bmatrix}.$$

- **Qubitization**:[11] if we alternate O_A and $O_A^\dagger$ interleaved with $e^{-i\phi(2|0\rangle\langle 0|-I)} \otimes I$, the operators behave as 2×2 matrices on orthogonal subspaces.

[11] [Low, Chuang, arXiv:1610.06546]

Quantum signal processing

Quantum Signal Processing (QSP) with reflection queries

Given positive integer n, angles $\phi_1, \dots, \phi_n \in [0, \pi]$, reflection $R(x) = \begin{bmatrix} x & \sqrt{1-x^2} \\ \sqrt{1-x^2} & -x \end{bmatrix}$ with $x \in [0, 1]$, consider

$$e^{-i\phi_1 Z} R(x) e^{-i\phi_2 Z} R(x) \cdots e^{-i\phi_n Z} R(x).$$

- **Quantum signal processing**[12] can also be performed using rotation queries $W(x) = \begin{bmatrix} x & i\sqrt{1-x^2} \\ i\sqrt{1-x^2} & x \end{bmatrix} = ie^{-i\frac{\pi}{4}Z} R(x) e^{-i\frac{\pi}{4}Z}$, giving the sequence

$$e^{i\psi_0 Z} W(x) e^{i\psi_1 Z} W(x) \cdots e^{i\psi_{n-1} Z} W(x) e^{i\psi_n Z}.$$

[12] [Low, Chuang, arXiv:1606.02685]

Relation with nonlinear Fourier transform

- This relates to nonlinear Fourier transform with $z = e^{i2\arccos(x)}$, $\gamma_k = \tan(\psi_k)$:

$$\frac{1}{\sqrt{2}}\begin{bmatrix}1 & 1\\ i & -i\end{bmatrix} e^{i\psi_0 Z} \prod_{k=1}^{n}\left(\begin{bmatrix}x & i\sqrt{1-x^2}\\ i\sqrt{1-x^2} & x\end{bmatrix} e^{i\psi_k Z}\right)\frac{1}{\sqrt{2}}\begin{bmatrix}1 & -1\\ 1 & i\end{bmatrix}$$
$$= \prod_{k=0}^{n}\left(\frac{1}{\sqrt{1+|\gamma_k|^2}}\begin{bmatrix}1 & \gamma_k z^k\\ -\overline{\gamma_k} z^{-k} & 1\end{bmatrix}\right)\begin{bmatrix}z^{\frac{n}{2}} & 0\\ 0 & z^{-\frac{n}{2}}\end{bmatrix}.$$

- This implies that

$$e^{i\psi_0 Z}\prod_{k=1}^{n}\left(\begin{bmatrix}x & i\sqrt{1-x^2}\\ i\sqrt{1-x^2} & x\end{bmatrix} e^{i\psi_k Z}\right) = \begin{bmatrix}p(x) & iq(x)\sqrt{1-x^2}\\ i\overline{q(x)}\sqrt{1-x^2} & \overline{p(x)}\end{bmatrix},$$

p has degree $\leq n$, q has degree $\leq n-1$, $|p|^2 + (1-x^2)|q|^2 = 1$ over $[-1,1]$.

Quantum singular value transformation

Quantum Singular Value Transformation (QSVT)

Given a block encoding of matrix A and degree-n real polynomial of definite parity with $\|p\|_{\max,[-1,1]} \leq 1$, one can block encode $\boldsymbol{p_{\mathrm{sv}}(A)}$ with **query complexity** $\sim \boldsymbol{n}$.

- Construct $p_{\mathbb{C}}$ and $q_{\mathbb{C}}$ such that $p = \Re(p_{\mathbb{C}})$ and $|p_{\mathbb{C}}|^2 + (1-x^2)\,|q_{\mathbb{C}}|^2 = 1$.
- Perform quantum signal processing with $p_{\mathbb{C}}$ and $q_{\mathbb{C}}$, as well as $\overline{p_{\mathbb{C}}}$ and $\overline{q_{\mathbb{C}}}$, where $\overline{p_{\mathbb{C}}}$ can be achieved by negating the phase angles.
- Finally, p can be recovered from the linear combination $p = \frac{p_{\mathbb{C}} + \overline{p_{\mathbb{C}}}}{2}$.

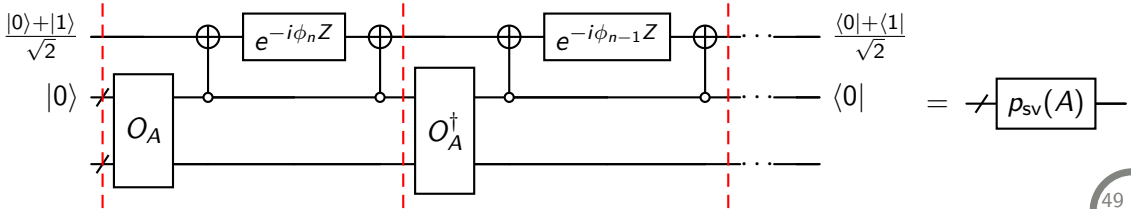

Hamiltonian simulation

Hamiltonian simulation

Suppose H can be block encoded with normalization factor α_H.

- Approximate $\cos(\alpha_H t x)$ and $\sin(\alpha_H t x)$ with polynomial degrees $n = \mathbf{O}\left(\alpha_H t + \log\left(\frac{1}{\epsilon}\right)\right)$.
- Apply QSVT to get approximate block encodings of $\cos\left(\alpha_H t \frac{H}{\alpha_H}\right) = \cos(tH)$ and $\sin\left(\alpha_H t \frac{H}{\alpha_H}\right) = \sin(tH)$.
- Taking a linear combination gives an approximate block encoding of $\frac{e^{-itH}}{2}$.

This block encodes $\frac{e^{-itH}}{2}$ with accuracy ϵ and query complexity $\mathbf{O}\left(\alpha_H t + \log\left(\frac{1}{\epsilon}\right)\right)$.

When applied to a state, this succeeds with amplitude $\frac{1}{2}$.

Matrix inversion

Matrix inversion

Suppose A can be block encoded with normalization factor $\alpha_A \geq \|A\|$ and $\alpha_{A^{-1}} \geq \|A^{-1}\|$ is a known upper bound, defining $\kappa = \alpha_A \alpha_{A^{-1}}$.

- Approximate $\frac{1}{2\kappa x}$ over $x \in \left[\frac{1}{\kappa}, 1\right]$ with polynomial degree $\mathbf{O}\left(\kappa \log\left(\frac{1}{\epsilon}\right)\right)$.
- Apply QSVT to $A^\dagger$ and approximately block encode $\frac{1}{2\kappa}\left(\frac{A}{\alpha_A}\right)^{-1} = \frac{A^{-1}}{2\alpha_{A^{-1}}}$.

This block encodes $\frac{A^{-1}}{2\alpha_{A^{-1}}}$ with accuracy ϵ and query complexity $\mathbf{O}\left(\kappa \log\left(\frac{1}{\epsilon}\right)\right)$.

When applied to $|b\rangle$, this succeeds with amplitude $\sqrt{p_{\text{succ}}} = \frac{\left\|A^{-1}|b\rangle\right\|}{2\alpha_{A^{-1}}}$, where

$$\frac{1}{\kappa} \leq \frac{\|A^{-1}|b\rangle\|}{\alpha_{A^{-1}}} \leq 1.$$

Roadmap

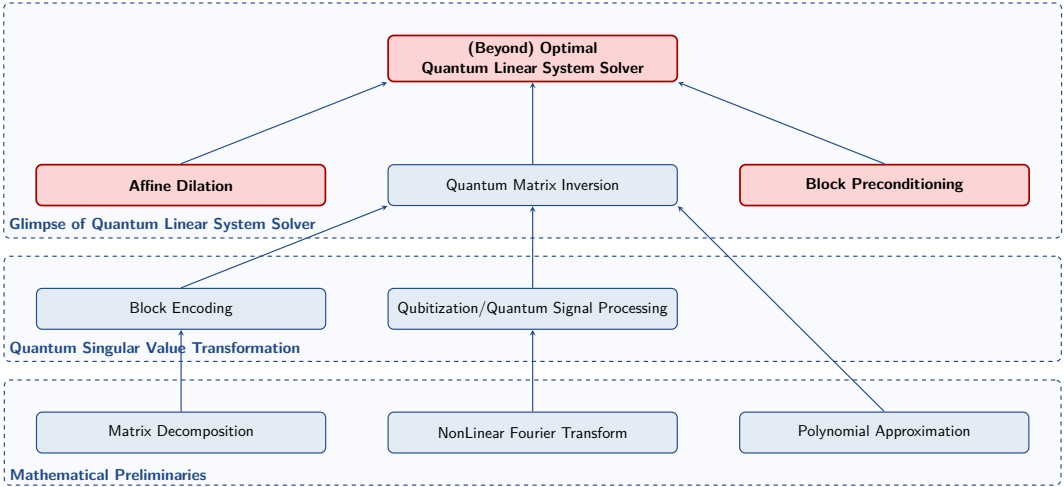
(Beyond) Optimal
Quantum Linear System Solver
Affine Dilation
Quantum Matrix Inversion
Block Preconditioning
Glimpse of Quantum Linear System Solver
Block Encoding
Qubitization/Quantum Signal Processing
Quantum Singular Value Transformation
Matrix Decomposition
NonLinear Fourier Transform
Polynomial Approximation
Mathematical Preliminaries

Quantum linear system problem

Quantum linear system problem

Given a block encoding of A and a circuit preparing $|b\rangle$, produce the quantum state

$$\frac{A^{-1}|b\rangle}{\|A^{-1}|b\rangle\|}.$$

- **BQP-complete**:[13] captures the full potential of quantum computing.
- Can be applied to solve scientific problems such as estimating many-body Green's functions $\langle\phi|(H - zI)^{-1}|\psi\rangle$.[14]
- **Useful primitive** for building more advanced quantum algorithms such as differential equation solvers and eigenvalue processors.[15]

[13] [Harrow, Hassidim, Lloyd, arXiv:0811.3171]
[14] [Tong, An, Wiebe, Lin, arXiv:2008.13295] [Wang, McArdle, Berta, arXiv:2302.01873]
[15] [Low, Su, arXiv:2401.06240]

Chronicles of quantum linear system solvers

Algorithm	Primary innovation	Queries to O_b	Queries to O_A
[Harrow, Hassidim, Lloyd, 2008]	Phase estimation + Hamiltonian simulation	$\mathbf{O}\left(\frac{1}{\sqrt{p_{\text{succ}}}}\right)$	$\mathbf{O}\left(\frac{\kappa}{\sqrt{p_{\text{succ}}}\epsilon^2}\right)$
[Ambainis, 2012]	VTAA	$\mathbf{O}\left(\kappa \text{polylog}\left(\frac{\kappa}{\epsilon}\right)\right)$	$\mathbf{O}\left(\frac{\kappa}{\epsilon^3}\log^3\left(\frac{\kappa}{\epsilon}\right)\log^2\left(\frac{1}{\epsilon}\right)\right)$
[Childs, Kothari, Somma, 2017]	Linear combination of quantum walks	$\mathbf{O}\left(\frac{1}{\sqrt{p_{\text{succ}}}}\log\left(\frac{\kappa}{\epsilon}\right)\right)$	$\mathbf{O}\left(\frac{\kappa}{\sqrt{p_{\text{succ}}}}\text{polylog}\left(\frac{\kappa}{\epsilon}\right)\right)$
[Childs, Kothari, Somma, 2017]	Gapped phase estimation + Quantum walk + VTAA	$\mathbf{O}\left(\kappa \text{polylog}\left(\frac{\kappa}{\epsilon}\right)\right)$	$\mathbf{O}\left(\kappa \text{polylog}\left(\frac{\kappa}{\epsilon}\right)\right)$
[Subasi, Somma, Orsucci, 2018]	Randomized abiabatic evolution	$\mathbf{O}\left(\frac{\kappa}{\epsilon}\log(\kappa)\right)$	$\mathbf{O}\left(\frac{\kappa}{\epsilon}\log(\kappa)\right)$
[Chakraborty, Gilyén, Jeffery, 2018]	Detailed analysis of VTAA	$\mathbf{O}\left(\frac{1}{\sqrt{p_{\text{succ}}}}\log(\kappa)\right)$	$\mathbf{O}\left(\kappa\log(\kappa)\log^2\left(\frac{\kappa}{\epsilon}\right)\right)$
[An, Lin, 2019]	Continuous time adiabatic evolution	$\mathbf{O}\left(\kappa \text{polylog}\left(\frac{\kappa}{\epsilon}\right)\right)$	$\mathbf{O}\left(\kappa \text{polylog}\left(\frac{\kappa}{\epsilon}\right)\right)$
[Lin, Tong, 2019]	Eigenstate filtering	$\mathbf{O}\left(\kappa\log\left(\frac{\kappa}{\epsilon}\right)\right)$	$\mathbf{O}\left(\kappa\log\left(\frac{\kappa}{\epsilon}\right)\right)$
[Costa, An et al., 2022]	Discrete time adiabatic evolution	$\mathbf{O}\left(\kappa\log\left(\frac{1}{\epsilon}\right)\right)$	$\Theta\left(\kappa\log\left(\frac{1}{\epsilon}\right)\right)$
[Chakraborty, Morolia, Peduri, 2023]	QSVT-based GPE + VTAA	$\mathbf{O}\left(\frac{1}{\sqrt{p_{\text{succ}}}}\log(\kappa)\right)$	$\mathbf{O}\left(\kappa\log(\kappa)\log\left(\frac{\kappa}{\epsilon}\right)\right)$
[Dalzell, 2024]	Kernel reflection	$\mathbf{O}\left(\kappa\log\left(\frac{1}{\epsilon}\right)\right)$	$\Theta\left(\kappa\log\left(\frac{1}{\epsilon}\right)\right)$
[Cunningham, Roland, 2024]	Poisson-distributed phase randomization	$\mathbf{O}\left(\kappa\log\left(\frac{1}{\epsilon}\right)\right)$	$\Theta\left(\kappa\log\left(\frac{1}{\epsilon}\right)\right)$
[Low, Su, 2024]	Tunable VTAA + Discretized inverse state	$\Theta\left(\frac{1}{\sqrt{p_{\text{succ}}}}\right)$	$\mathbf{O}\left(\kappa\log\left(\frac{1}{\sqrt{p_{\text{succ}}}}\right)\log\left(\frac{\log(1/\sqrt{p_{\text{succ}}})}{\epsilon}\right)\right)$
[Low, Su, 2024]	Block preconditioning	$\mathbf{O}\left(\kappa\log\left(\frac{1}{\epsilon}\right)\right)$	$\Theta\left(\kappa\log\left(\frac{1}{\epsilon}\right)\right)$
[Li, 2025]	Filtering with effective gap	$\mathbf{O}\left(\frac{\\|A^{-1\dagger}\|x\rangle\\|}{\epsilon^2}\right)$	$\mathbf{O}\left(\frac{\\|A^{-1\dagger}\|x\rangle\\|}{\epsilon^2}\right)$
[Dalzell, Li, Su, 2026]	Effective truncation of linear system	$\Theta\left(\frac{1}{\sqrt{p_{\text{succ}}}}\right)$	$\mathbf{O}\left(\kappa_{\text{eff}}\log\left(\frac{1}{\sqrt{p_{\text{succ}}}}\right)\log\left(\frac{\log(1/\sqrt{p_{\text{succ}}})}{\epsilon}\right)\right)$
[Dalzell, Li, Su, 2026]	Improved filtering with effective gap	$\mathbf{O}\left(\frac{\\|A^{-1\dagger}\|x\rangle\\|}{\epsilon}\log\left(\frac{1}{\epsilon}\right)\right)$	$\mathbf{O}\left(\frac{\\|A^{-1\dagger}\|x\rangle\\|}{\epsilon}\log\left(\frac{1}{\epsilon}\right)\right)$

Affine dilation

Affine dilation

Given matrix A with norm bounds $\alpha_A \geq \|A\|$ and $\alpha_{A^{-1}} \geq \|A^{-1}\|$, state $|b\rangle$, and scalar $0 < c \leq 1$, define the affine dilation $\begin{bmatrix} \frac{A}{\alpha_A} & -|b\rangle\langle 0| \\ 0 & cI \end{bmatrix}$, which has inverse

$$\begin{bmatrix} \frac{A}{\alpha_A} & -|b\rangle\langle 0| \\ 0 & cI \end{bmatrix}^{-1} = \begin{bmatrix} \alpha_A A^{-1} & \frac{\alpha_A}{c} A^{-1} |b\rangle\langle 0| \\ 0 & \frac{1}{c} I \end{bmatrix}.$$

Instead of $Ax = |b\rangle$, we solve the dilated linear system

$$\underbrace{\begin{bmatrix} \frac{A}{\alpha_A} & -|b\rangle\langle 0| \\ 0 & cI \end{bmatrix}}_{\widetilde{A}} \underbrace{\begin{bmatrix} \frac{\alpha_A}{c} x \\ \frac{1}{c} |0\rangle \end{bmatrix}}_{\widetilde{x}} = \underbrace{\begin{bmatrix} 0 \\ |0\rangle \end{bmatrix}}_{|\widetilde{b}\rangle}.$$

Block preconditioning

- The affine dilation $\widetilde{A}$ can be block encoded with normalization factor 2:

$$\widetilde{A} = \begin{bmatrix} \frac{A}{\alpha_A} & -|b\rangle\langle 0| \\ 0 & cI \end{bmatrix} = \begin{bmatrix} \frac{A}{\alpha_A} & cI \end{bmatrix} + \frac{1}{2}\begin{bmatrix} -|0\rangle\langle b| & -|b\rangle\langle 0| \end{bmatrix} + \frac{1}{2}\begin{bmatrix} |0\rangle\langle b| & -|b\rangle\langle 0| \end{bmatrix}.$$

- Its inverse has the norm bound

$$\left\|\widetilde{A}^{-1}\right\| = \left\| \begin{bmatrix} \alpha_A A^{-1} & \frac{\alpha_A}{c} A^{-1}|b\rangle\langle 0| \\ 0 & \frac{1}{c} I \end{bmatrix} \right\| \leq \max\left(\kappa, \frac{1}{c}\right) + \frac{\kappa\sqrt{p_{\text{succ}}}}{c}.$$

- Meanwhile, the solution norm increases to

$$\left\|\widetilde{A}^{-1}\left|\widetilde{b}\right\rangle\right\| = \left\| \begin{bmatrix} \frac{\alpha_A}{c} A^{-1}|b\rangle \\ \frac{1}{c}|0\rangle \end{bmatrix} \right\| = \sqrt{\frac{\kappa^2 p_{\text{succ}}}{c^2} + \frac{1}{c^2}}.$$

Block preconditioning

- In particular, choosing $c = \sqrt{p_{\text{succ}}}$ gives $\alpha_{\widetilde{A}} = 2$, $\alpha_{\widetilde{A}^{-1}} = 2\kappa$, and $\sqrt{\widetilde{p}_{\text{succ}}} = \frac{\left\|\widetilde{A}^{-1}|\widetilde{b}\rangle\right\|}{\alpha_{\widetilde{A}^{-1}}} = \frac{1}{2\kappa}\sqrt{\kappa^2 + \frac{1}{p_{\text{succ}}}} \geq \frac{1}{2}$.

Optimal quantum linear system solver by block preconditioning[16]

- Construct the affine dilation $\widetilde{A}$ with $c = \frac{\left\|A^{-1}|b\rangle\right\|}{\alpha_{A^{-1}}}$.
- QSVT gives a block encoding of $\frac{\widetilde{A}^{-1}}{2\alpha_{\widetilde{A}^{-1}}}$ with accuracy ϵ and cost $\mathbf{O}\left(\kappa \log\left(\frac{1}{\epsilon}\right)\right)$, which has constant success amplitude when applied to the initial state.

- This produces $\frac{A^{-1}|b\rangle}{\|A^{-1}|b\rangle\|}$ with query complexity $\mathbf{O}\left(\kappa \log\left(\frac{1}{\epsilon}\right)\right)$.
- The solution norm $\|A^{-1}|b\rangle\|$ can be estimated via a similarly simple algorithm.

[16] [Low, Su, arXiv:2410.18178]

Going beyond the condition number

- The condition number $\kappa = \alpha_A \alpha_{A^{-1}}$ measures the worst-case cost, where $\alpha_A \geq \|A\|$ and $\alpha_{A^{-1}} \geq \|A^{-1}\|$.
- α_A can be reduced through a direct block encoding of the affine dilation.
- $\alpha_{A^{-1}}$ can be reduced to the **effective condition numberz** α_{eff}. However, this effective truncation requires **variable time amplitude amplification**.[17]

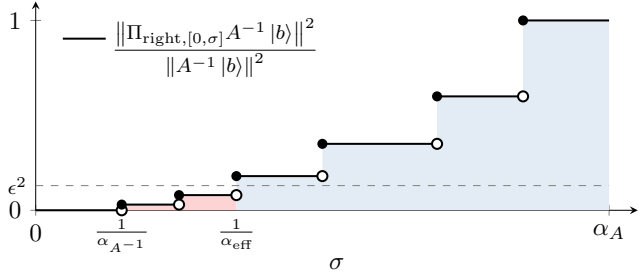

[17] [Dalzell, Li, Su, arXiv:2607.07691]

Roadmap

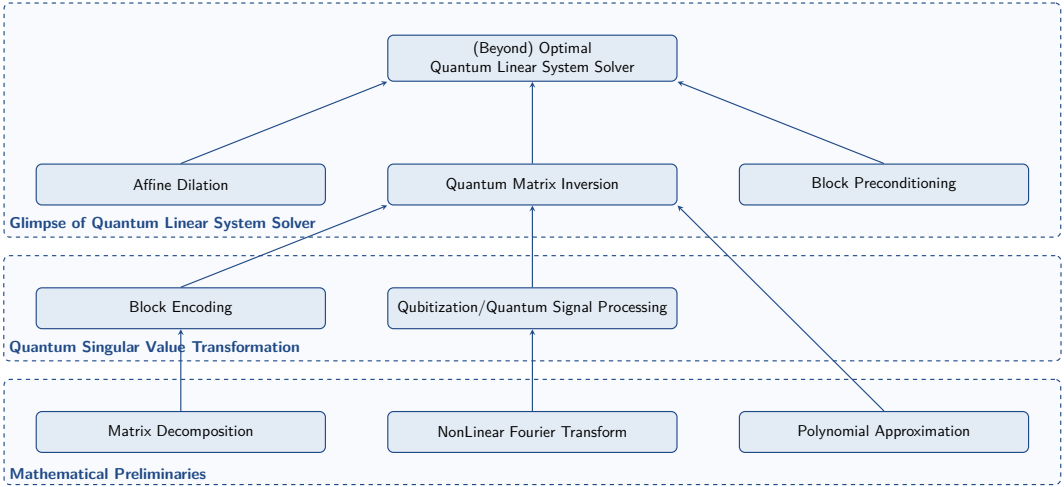
(Beyond) Optimal
Quantum Linear System Solver
Affine Dilation
Quantum Matrix Inversion
Block Preconditioning
Glimpse of Quantum Linear System Solver
Block Encoding
Qubitization/Quantum Signal Processing
Quantum Singular Value Transformation
Matrix Decomposition
NonLinear Fourier Transform
Polynomial Approximation
Mathematical Preliminaries

Landscape of quantum algorithms

Recommended reading for the landscape of quantum algorithms:

- Quantum algorithm zoo: `https://quantumalgorithmzoo.org/`
- Survey by the AWS quantum team: `https://arxiv.org/abs/2310.03011`

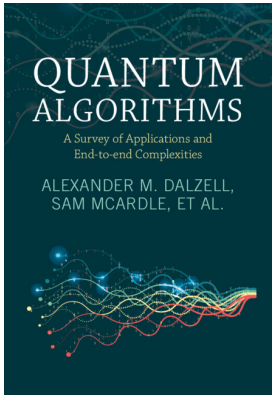

Quantum Algorithms

A Survey of Applications and End-to-end Complexities

ALEXANDER M. DALZELL
AWS Center for Quantum Computing
SAM MCARDLE
AWS Center for Quantum Computing
MARIO BERTA
RWTH Aachen University and Imperial College London
PRZEMYSLAW BIENIAS
AWS Center for Quantum Computing
CHI-FANG CHEN
University of California, Berkeley
ANDRÁS GILYÉN
HUN-REN Alfréd Rényi Institute of Mathematics
CONNOR T. HANN
AWS Center for Quantum Computing
MICHAEL J. KASTORYANO
University of Copenhagen and AWS Center for Quantum Computing
EMIL T. KHABIBOULLINE
National Institute of Standards and Technology and University of Maryland, College Park
ALEKSANDER KUBICA
Yale University
GRANT SALTON
Amazon Quantum Solutions Lab and AWS Center for Quantum Computing
SAMSON WANG
Caltech
FERNANDO G. S. L. BRANDÃO
AWS Center for Quantum Computing and Caltech

CAMBRIDGE
UNIVERSITY PRESS

Downloaded from https://www.cambridge.org/core. Caltech Library, on 17 Jul 2025 at 23:12:00, subject to the Cambridge Core terms of use, available at https://www.cambridge.org/core/terms. https://doi.org/10.1017/9781316809815